



U.S. Department
of Transportation
Federal Highway
Administration

Memorandum

Subject: **INFORMATION:** MUTCD – Interim
Approval for Optional Use of Two-Stage
Bicycle Turn Boxes (IA-20)

Date: JUL - 7 2017

From: Martin C. Knopp *Mart CK*
Associate Administrator for Operations

In Reply Refer To:
HOTO-1

To: Federal Lands Highway Division Directors
Division Administrators

Purpose: The purpose of this memorandum is to issue an Interim Approval for the optional use of two-stage bicycle turn boxes. Interim Approval allows interim use, pending official rulemaking, of a new traffic control device, a revision to the application or manner of use of an existing traffic control device, or a provision not specifically described in the *Manual on Uniform Traffic Control Devices for Streets and Highways* (MUTCD). State and local agencies must request and receive permission from the Federal Highway Administration (FHWA) in accordance with the provisions of Section 1A.10 of the MUTCD before they can apply the optional device or application described in this Interim Approval.

Background: The standard design of on-street bicycle lanes has placed these lanes to the right side of the general travel lanes. Left-turn movements from such bicycle lanes can sometimes be challenging, with more bicycle lanes being placed on multi-lane roadways, the increasing use of physically-separated bicycle lanes, and an increase in urban rail systems that might require a bicyclist to cross tracks at a shallow angle. The Federal Highway Administration has been requested by stakeholders to provide traffic control devices to facilitate alternative methods for bicyclists on the curb side of traffic to turn left (or right if the facility is located to the left of the general travel lanes) without either being able to merge across a physical barrier or facing a difficult merge across multiple lanes of potentially higher-speed traffic. The two-stage bicycle turn box might also encourage bicyclists to stay within on-street bicycle facilities rather than using the sidewalks and crosswalks around intersections, thus reducing conflicts with pedestrians.

The two-stage bicycle turn box is an area set aside for bicyclists to queue to turn at a signalized intersection outside of the traveled path of motor vehicles and other bicycles. When using a two-stage bicycle turn box to make a left turn, a bicyclist would proceed on a green signal indication to the turn box on the right-hand side of the travel lanes, and then turn left within the turn box and wait for the appropriate signal indication on the cross street to proceed. Two-stage bicycle turn boxes can also be used with a left-side bicycle facility to facilitate bicyclists turning right. In addition to mitigating conflicts inherent in merging across traffic to turn, two-stage bicycle turn boxes reduce conflicts between

treatment in the State of California's *Bikeway Planning Criteria and Guidelines*, prepared by the Institute for Transportation and Traffic Engineering at the University of California, Los Angeles. The two-stage bicycle turn box was also featured in the 1974 AASHTO *Guide for Bicycle Routes* as an alternative to bicycle channelization at intersections.

The two-stage bicycle turn box described in this Interim Approval memorandum is a new traffic control device to the MUTCD and has been used in the United States only on an experimental basis through the MUTCD experimentation process, which is described in Section 1A.10 of the 2009 edition of the MUTCD.

Research on Two-Stage Bicycle Turn Boxes: Agencies around the country have shown significant interest in two-stage bicycle turn boxes, with 12 experiments approved under the 2009 edition of the MUTCD for a variety of government agencies. Data and observations were collected from agencies including the cities of Charlottesville, VA; Charlotte, NC; Atlanta, GA; San Francisco, CA; Toronto, ON, Canada; and many others. Although the Toronto data were collected internationally, the design and operation of the facilities in that study were functionally identical to those featured in this Interim Approval.

These experiments and other installations have used a relatively consistent design of a two-stage bicycle turn box that includes the following elements:

- Pavement markings designating a queuing area for bicyclists outside of the travel paths of motor vehicles and other bicyclists
- Bicycle symbol and turn arrow pavement markings indicating the appropriate direction for bicyclists to turn and wait within the box
- Prohibition of turns on red if turning vehicles would travel through the area of the two-stage bicycle turn box

FHWA Evaluation of Results: The Office of Transportation Operations has reviewed the available data and considers the experimental two-stage bicycle turn box to be successful for the applications that were tested. Positive operational effects have been documented in the experiments after the installation of two-stage bicycle turn boxes. Most significantly, two-stage bicycle turn boxes have been shown to positively influence consistency in the operations of bicyclists making two-stage turns at intersections, a maneuver which had been occurring already at many of the studied locations.

In examining the data recorded at installed locations in the field, these improvements in consistency were noted at a majority of the installed sites. Where the two-stage bicycle turn boxes were installed, bicyclists were making a two-stage turn maneuver within or mostly within the turn box. At some study locations the only reason bicyclists were not using the two-stage bicycle turn box was that it was already fully occupied by other bicyclists making the same maneuver. Most of the sites where data were collected did not include guide signing to direct or inform bicycle traffic about the location of the turn box, and the data and observations suggest that signing is not required for proper understanding and operations of two-stage bicycle turn boxes.

The available collision data did not show an adverse impact on safety due to the installation of two-stage bicycle turn boxes. Two sites showed a decrease in collisions and two sites

showed an increase, although the increases were limited to one collision in a 19-month analysis period.

The design of the two-stage bicycle turn box is not patented or proprietary and may be used by any jurisdiction that requests and obtains Interim Approval from the FHWA to use two-stage bicycle turn boxes in accordance with Paragraphs 14 through 22 of Section 1A.10 of the MUTCD. The FHWA believes that the two-stage bicycle turn box as detailed in this memorandum has a low risk of safety or operational concerns and the research analyzed shows that two-stage bicycle turn boxes can provide for a more orderly and consistent flow of traffic.

This Interim Approval does not create a new mandate compelling the use of two-stage bicycle turn boxes. This Interim Approval will allow agencies to install two-stage bicycle turn boxes to facilitate bicycle operations at intersections pending official MUTCD rulemaking.

Conditions of Interim Approval: The FHWA will grant permission for the optional use of two-stage bicycle turn boxes under this Interim Approval to any jurisdiction that submits a written request to the Office of Transportation Operations. A State may request Interim Approval for all jurisdictions in that State. Jurisdictions seeking permission to use two-stage bicycle turn boxes under this Interim Approval must agree to the following:

- Comply with the technical conditions detailed below
 - Maintain an inventory list of all locations where two-stage bicycle turn boxes are installed
 - Comply with Item D in Paragraph 18 of Section 1A.10 of the MUTCD
1. **General Conditions:** The use of two-stage bicycle turn boxes is optional. However, if an agency opts to use two-stage bicycle turn boxes under this Interim Approval, such use shall be limited to signalized intersections. The design of the two-stage bicycle turn box shall comply with the design conditions provided below.
 2. **Design of Two-Stage Bicycle Turn Boxes:** A two-stage bicycle turn box is an area designated for bicycles waiting to proceed in a different direction and to formalize two-stage turn maneuvers in a predictable pattern, thereby establishing expectancy for road users. The following provisions apply to the design of the two-stage bicycle turn box (see Attachments IA-20-1 and IA-20-2):
 - a. Two-stage bicycle turn boxes shall include an appropriately-sized bicycle symbol as shown in Figure 9C-3A of the MUTCD oriented in the direction of entering bicycle traffic as shown in Attachment IA-20-1 and an arrow indicating the direction of the intended turn.
 - b. Two-stage bicycle turn boxes shall be bounded by a solid white line on all sides.
 - c. Two-stage bicycle turn boxes should be placed in a location downstream of the cross street intersection stop line and downstream of the crosswalk across the cross street.
 - d. Two-stage bicycle turn boxes shall be placed such that queued bicyclists are outside of the paths of moving traffic.

- e. Where the paths of other vehicles turning on a red signal would travel through the two-stage bicycle turn box, these turns shall be prohibited using a NO TURN ON RED (R10-11 series) sign.
- f. Passive detection of bicycles shall be provided in the two-stage bicycle turn box if detection is required to actuate the signal for the cross street.
- g. Two-stage bicycle turn boxes should be placed at the head of an approach, where bicyclists making the indicated turn would join the flow of traffic from the lane in front of which the box is placed. Two-stage bicycle turn boxes may also be placed alongside an intersection where there is no intersecting approach.
- h. Two-stage bicycle turn boxes should be placed in a location near the bicycle lane from which bicycle traffic would enter the two-stage bicycle turn box or near the expected bicycle travel path to minimize deviation from that travel path.
- i. Two-stage bicycle turn boxes should be placed so as to avoid conflicts with crosswalks.
- j. Green-colored pavement may be used within a two-stage bicycle turn box. A separate request for Interim Approval for green-colored pavement is required if the agency has not already received such an approval.
- k. The use of guide signing for two-stage bicycle turn boxes is optional. If an agency opts to use guide signing with two-stage bicycle turn boxes, it shall be either the Two-Stage Bicycle Turn Box Advance (D11-20) guide sign or the Two-Stage Bicycle Turn Box (D11-20a) guide sign as shown in Attachment IA-20-1. The following design and installation conditions apply to the use of guide signing for two-stage bicycle turn boxes.
 - i. Where used, the Two-Stage Bicycle Turn Box Advance guide sign shall be mounted in advance of an intersection.
 - ii. Where the Two-Stage Bicycle Turn Box Advance guide sign is used, an additional Two-Stage Bicycle Turn Box Advance guide sign may be mounted on the near side of the same intersection.
 - iii. Where used, the Two-Stage Bicycle Turn Box guide sign shall be mounted on the far side of an intersection.
 - iv. The minimum size of the Two-Stage Bicycle Turn Box guide sign and Advance guide sign shall be 12 inches in width by 18 inches in height.
- l. The use of regulatory signing for two-stage bicycle turn boxes is required where use of the boxes by turning bicycles is mandatory. The signs used shall be the Two-Stage Bicycle Turn Box Advance (R9-23) regulatory sign and the Two-Stage Bicycle Turn Box (R9-23a, R9-23b) regulatory sign as shown in Attachment IA-20-2. The following design and installation conditions apply to the use of regulatory signing for two-stage bicycle turn boxes.
 - i. Mandatory use of a two-stage bicycle turn box by turning bicycles should be limited to those locations where physical or operational conditions make it impracticable or unsafe for a bicyclist to merge and make the appropriate turn as would any other vehicle.
 - ii. Where use of a two-stage bicycle turn box by turning bicycles is mandatory, the Two-Stage Bicycle Turn Box Advance (R9-23) regulatory sign shall be mounted in advance of an intersection. The sign should be placed at an adequate distance in advance of the intersection to discourage bicycle traffic from unnecessarily moving out of the bike lane in preparation for a turning movement.


- iii. Where use of a two-stage bicycle turn box by turning bicycles is mandatory, at least one Two-Stage Bicycle Turn Box (R9-23a or R9-23b) regulatory sign shall be mounted at the intersection.
 1. When the R9-23a sign is used, it shall be mounted on the near side of an intersection.
 2. When the R9-23b sign is used, it shall be mounted on the far side of an intersection
- iv. The minimum size of the Two-Stage Bicycle Turn Box regulatory and Advance regulatory signs shall be 12 inches in width by 18 inches in height.

Any questions concerning this Interim Approval should be directed to Mr. Dave Kirschner at david.kirschner@dot.gov.


cc:



Associate Administrators
Acting Chief Counsel
Chief Financial Officer
Directors of Field Services
Director of Technical Services

Attachment IA-20-1
Example of Two-Stage Bicycle Turn Box when Use is Optional

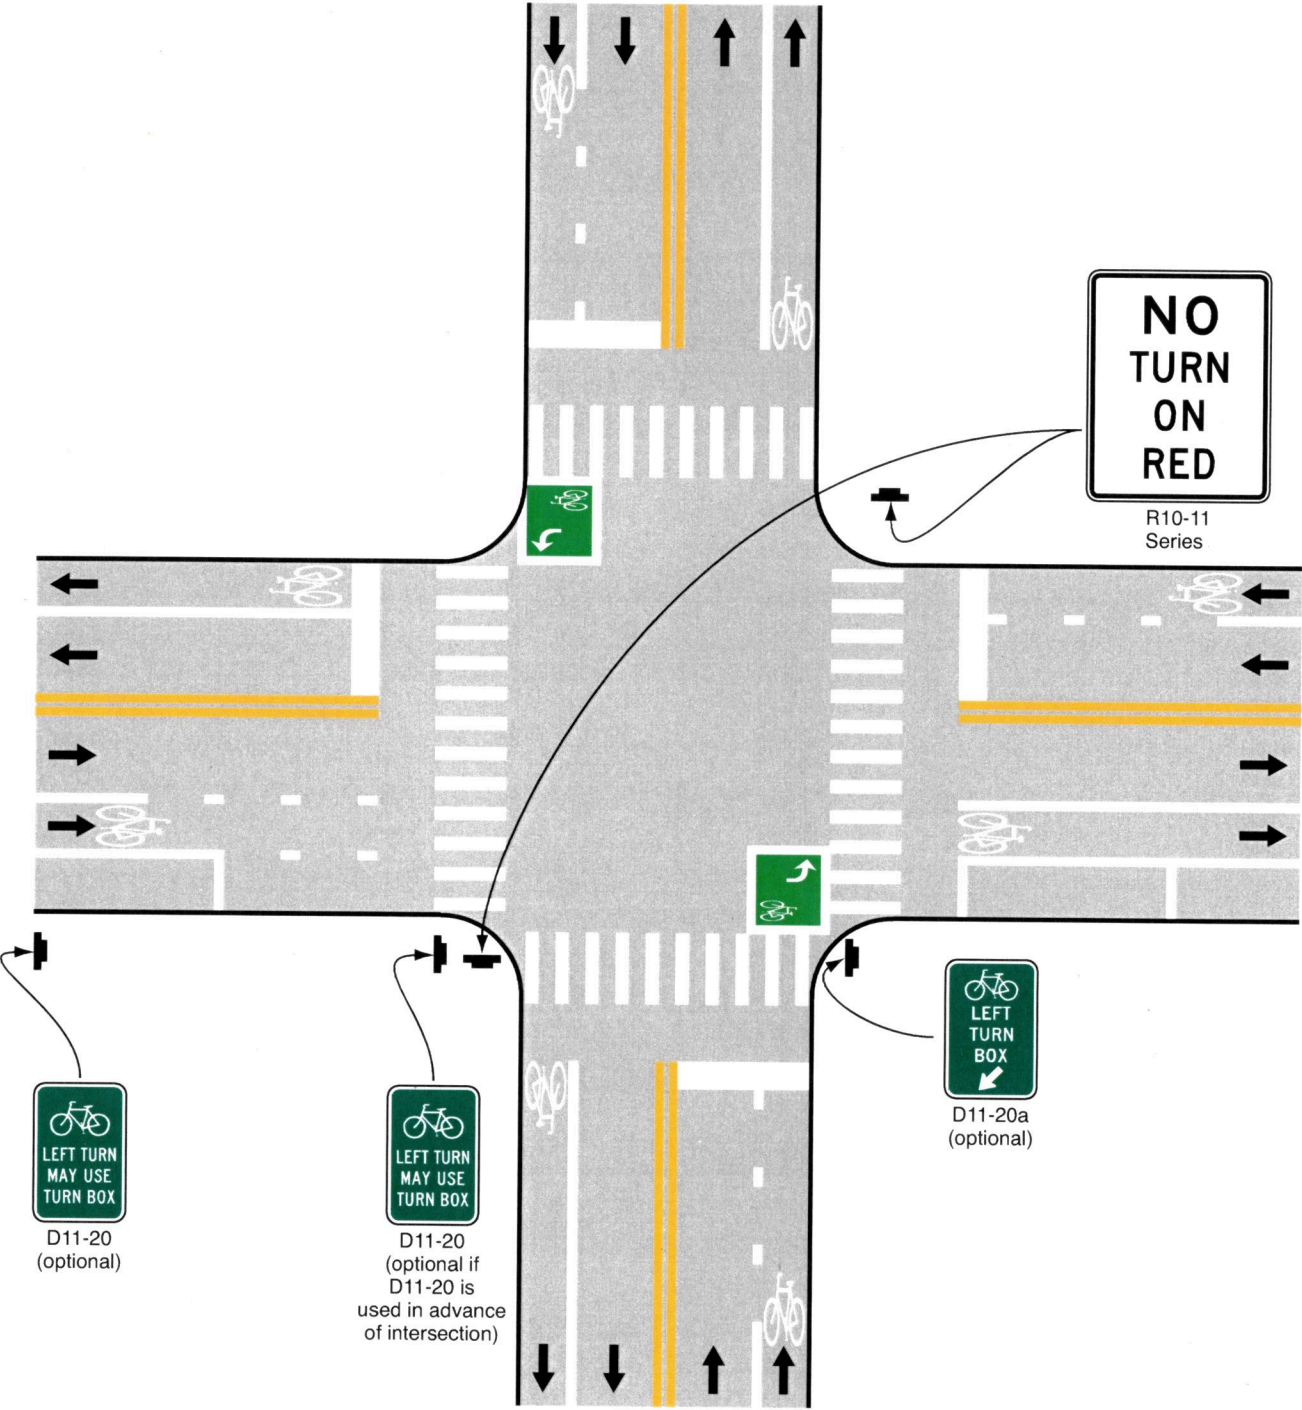


Attachment IA-20-2
Example of Two-Stage Bicycle Turn Box when Use is Mandatory

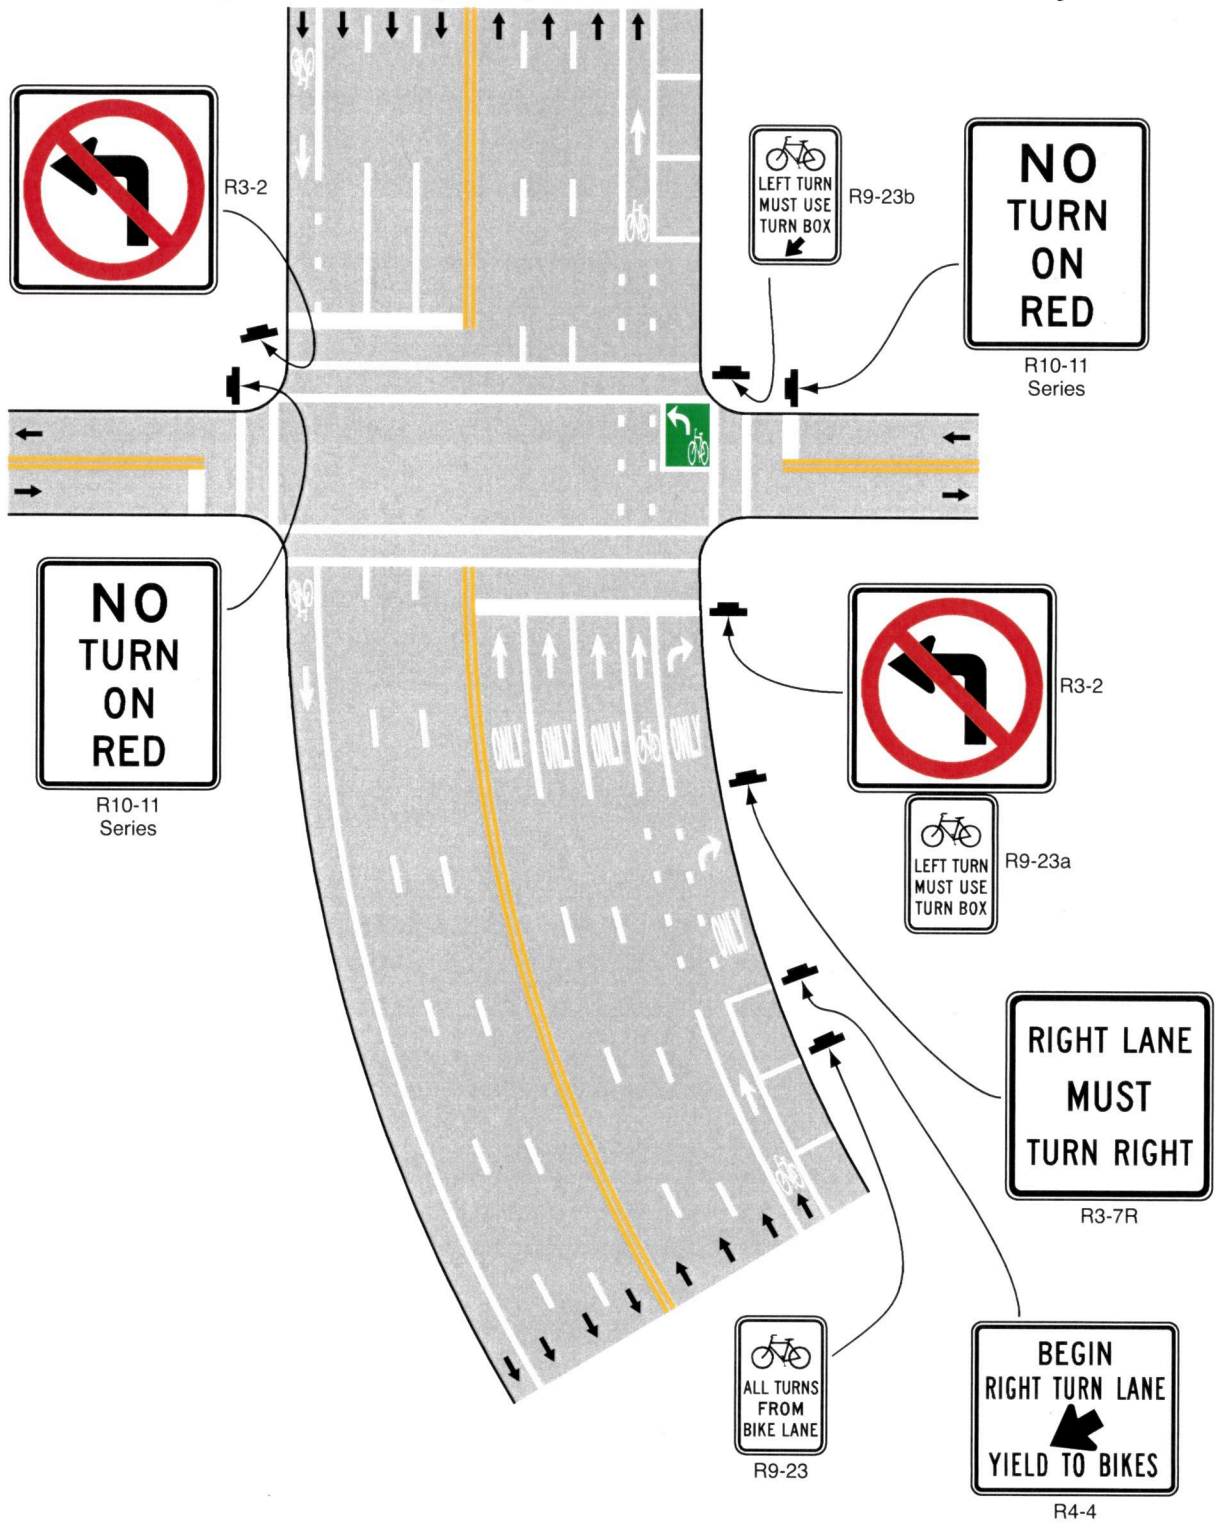

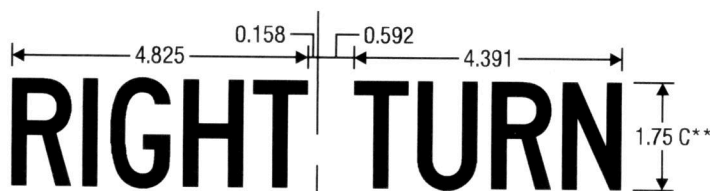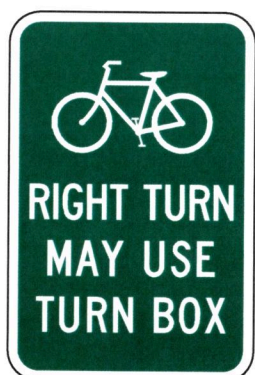


COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
BACKGROUND — GREEN (RETROREFLECTIVE)

* Reduce character spacing 20%.
** Reduce character spacing 40%.

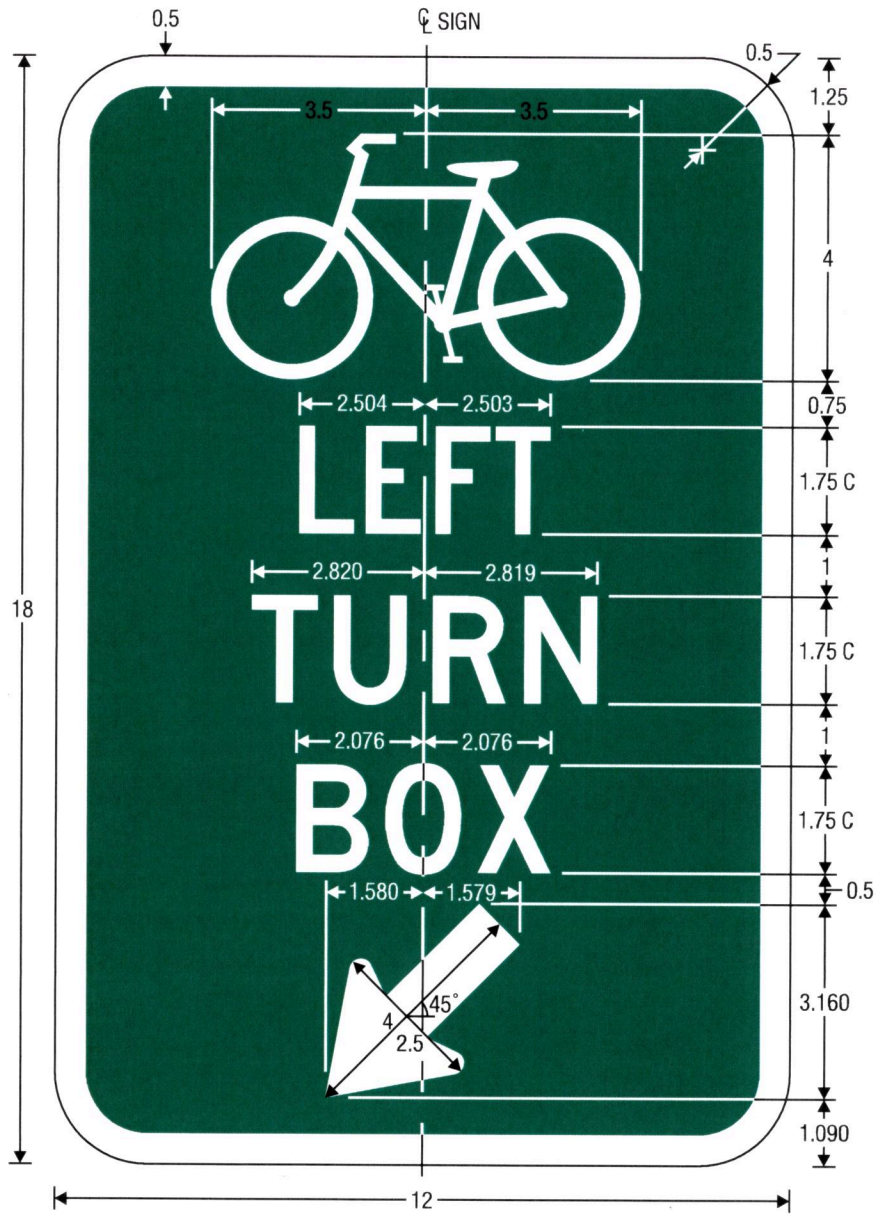

D11-20aL


LEFT (RIGHT) TURN BOX (with arrow)

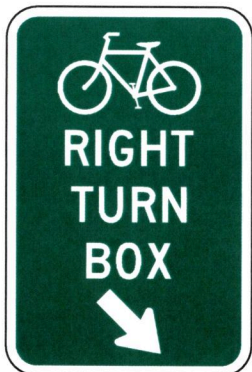

D11-20aR



COLORS: LEGEND, BORDER — WHITE (RETROREFLECTIVE)
BACKGROUND — GREEN (RETROREFLECTIVE)

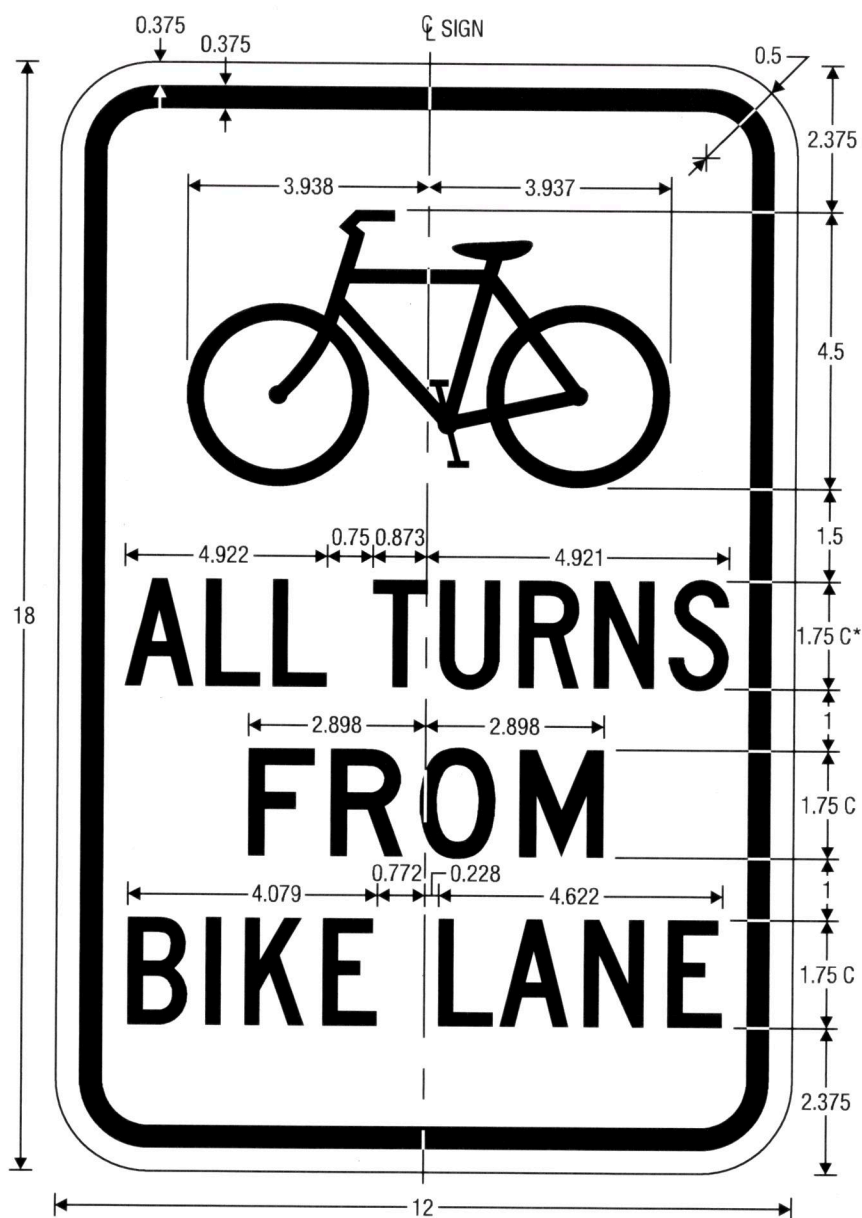


R9-23

ALL TURNS FROM BIKE LANE

* Reduce character spacing 20%.

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — WHITE (RETROREFLECTIVE)

IA-20-5

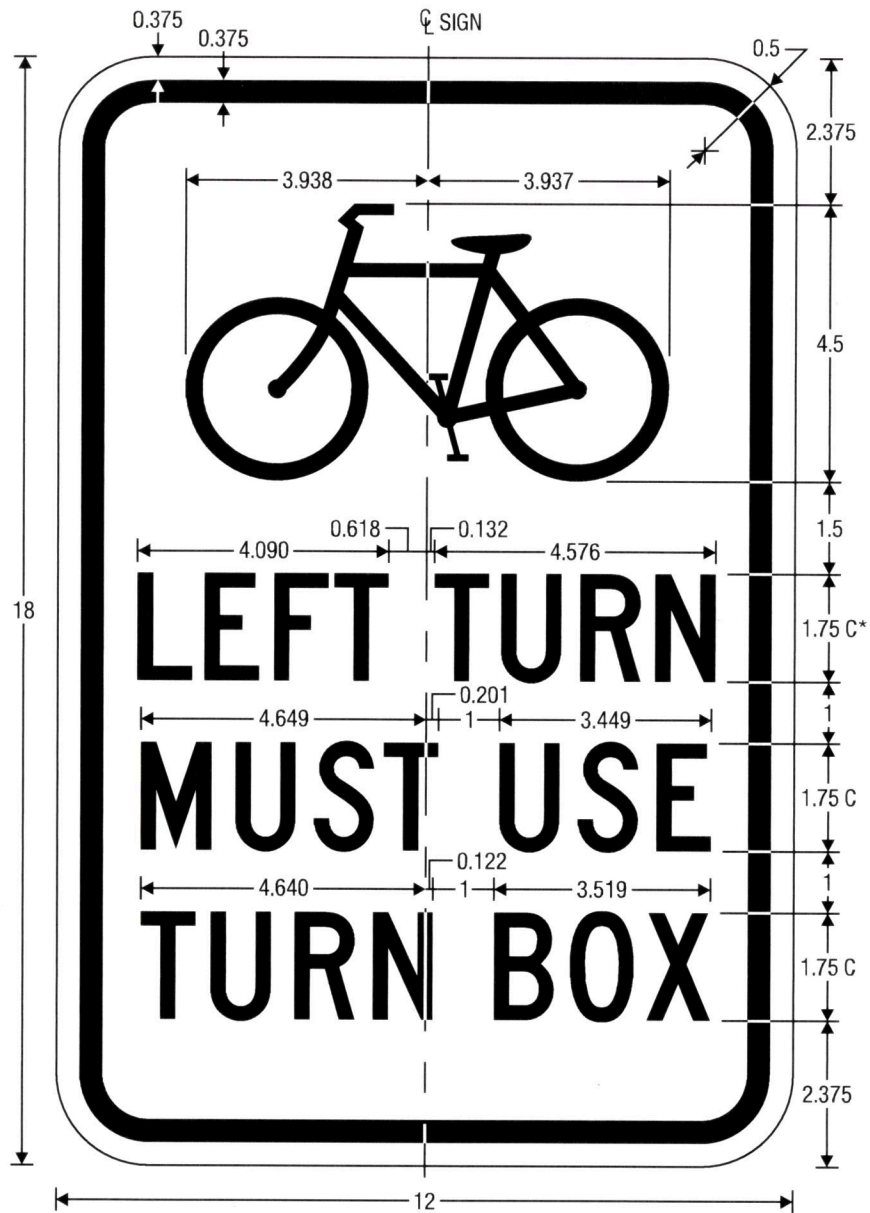


R9-23aL

LEFT (RIGHT) TURN MUST USE TURN BOX




R9-23aR

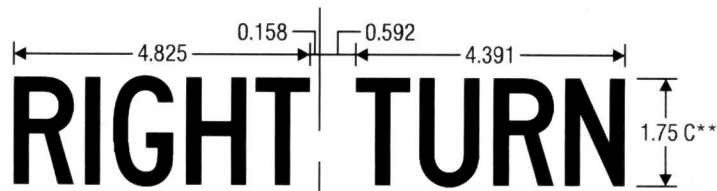

* Reduce character spacing 20%.

** Reduce character spacing 40%.

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — WHITE (RETROREFLECTIVE)

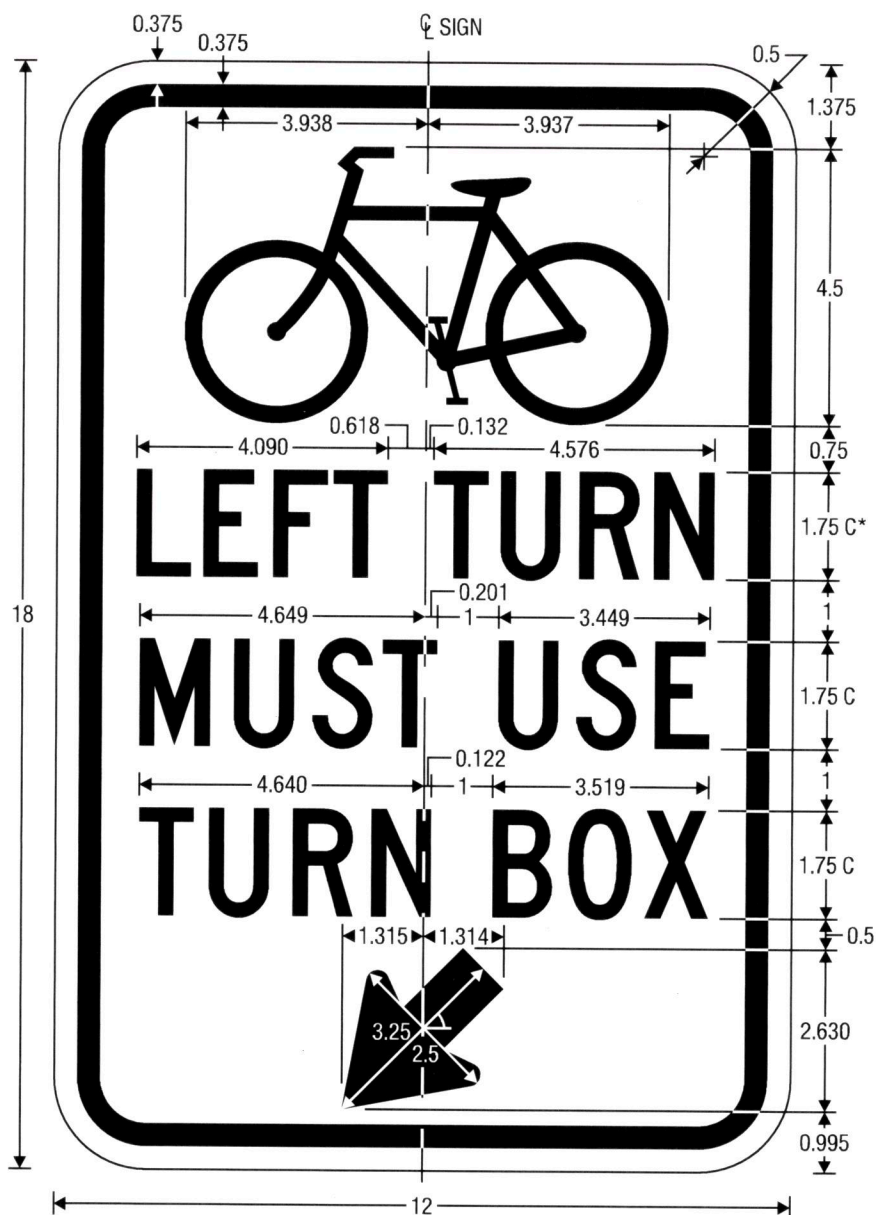


R9-23bL

LEFT (RIGHT) TURN MUST USE TURN BOX (with arrow)



R9-23bR

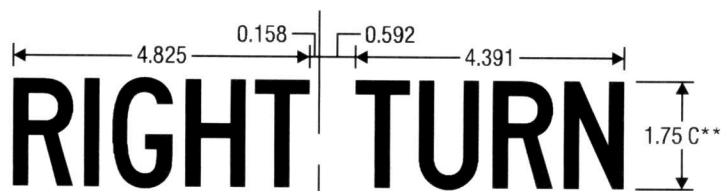

- * Reduce character spacing 20%.
- ** Reduce character spacing 40%.

COLORS: LEGEND, BORDER — BLACK
BACKGROUND — WHITE (RETROREFLECTIVE)